

DHI-LCH55/65/75/86-MC410-B

55/65/75/86 inch Smart Interactive Whiteboard



System Overview

Dahua DeepHub Lite Series Smart Interactive Whiteboard has powerful processing capabilities with its built-in 4-core CPU, 4-core GPU, 4G RAM, 32G storage, and Android 9 OS.With a high-precision infrared touch sensor and a 4K DLED display, Dahua DeepHub will give you an extraordinary experience of writing, controlling, and content displaying. It features video conferencing, wireless screen sharing, UHD display, scan & go, etc., and will be your go-to choice to digitalize your office and classrooms.

Functions

Real Writing Experience

The intelligent whiteboard supports pen-point writing. With its Zero Air Gap technology and low latency, writing on the whiteboard feels natural, similar to the real writing experience.

Wireless Screen Sharing

In addition to basic file sharing, the device offers wireless screen sharing, interactive operations between two screens, and reverse transmissions. It also supports screen grouping (multiple transmission), host mode (for overall permission control), real-time transmission of images, videos and audios from the wireless camera of the mobile phone to the device, and split-screen mode that displays up to 9 splits on the same screen.

Easy to Share

Enhances the experience of sharing files by scanning a code. It automatically determines the network of the device to readily share the QR code across the extranet and the intranet. QR code encryption and extraction are also featured, providing privacy and data security through the required entry of a 6-digit password for verification.

Hidden Antenna Design

The Wi-Fi and hotspot antenna is neatly concealed in the front of the device, ensuring the stability of the signal strength when using a flush mount, and giving the device its simple and sleek appearance.

- 4K HD display.
- Supports using both Android and Windows (PC module must be installed).
- Wireless screen sharing from multiple devices, such as phones, computers, and tablets.
- · Supports being written on with a stylus.
- · Supports Office software, and playing videos and audio files.
- The startup channels are all customizable.
- · Wired and wireless network support.
- · Built-in 5-MP camera.

Scene

The whiteboard is ideal for use in indoor sites such as in meeting rooms, command centers, hospitals, banks and classrooms.

Technical Specification

Built-in System

Operating System of External Module	Android 9.0
CPU	Quad-core A55
CPU Frequency	1.9 GHz
GPU	Mali-G31 MP2
RAM	4 GB
ROM	32 GB

Function

Applicable Operating Systems	Windows 7/8/10; Android
WiFi	Dual-band 2.4 Ghz/5 Ghz
Wi-Fi Hotspot	Dual-band 2.4 Ghz/5 Ghz; supports enabling hotspot and Wi-Fi at the same time


LCD Panel

Panel Dimensions	55-inch; 65-inch; 75-inch; 86-inch
Backlight	DLED
Aspect Ratio	16:9
Brightness	55-inch: 300 cd/m²; 65-inch: 350 cd/m²; 75-inch: 350 cd/m²; 86-inch: 400 cd/m²
Resolution	3840 (H) × 2160 (V) UI: 1920 (H) × 1080 (V)
Viewing Angle	H: 178°; V: 178°
Lifespan	50,000 hours
Display Color	1.07 B/10 bit (8 bit + FRC)

Response Time	8 ms (typ.)	Number of Microphones	2
Refresh Rate	60 Hz	AGC	Yes
Static Contrast	VA: 4000 (typ.); IPS: 1200 (typ.)	Echo Cancellation	Yes
Camera		Polar Pattern	Omnidirectional
Pixel	5 MP	Intelligent Noise Filtering	YES
Auto Control	Auto white balance	General	
Distortion	≤ 5%	Power Supply	100–240 VAC, 50 Hz/60 Hz
Max. Resolution	Android: 1080p@30fps; OPS: 2560 × 1440@30fps		55-inch: 90 W (typ.); 200 W (max.);
Field of View	H:84.5°; V: 54.0°; D: 93.1°	Power Consumption	65-inch: 90 W (typ.); 250 W (max.); 75-inch: 110 W (typ.); 300 W (max.); 86-inch: 120 W (typ.); 400 W (max.)
Device Ports		Operating Temperature	0 °C to +40 °C (32 °F to +104 °F)
Light Sensor	1	Storage Temperature	-10 °C to +50 °C (-14 °F to +122 °F)
Front Button	1 × Power button (right side)	Operating Humidity	10%-90% (RH)
Front Ports	1 × USB 3.0 (left side)	Storage Humidity	10%–90% (RH)
Network Port	1 × RJ-45	Product Material	Metal casing
Wi-Fi	$1 \times \text{Wi-Fi}; 1 \times \text{hotspot}$	Casing Color (Frame/Rear)	Bottom: Silver; top/left/right: black
USB	2 × USB 3.0 (Rear-facing); 1 × Micro USB		65-inch: 1,485.0 mm × 86.9 mm × 924.7 mm
RS-232	1 × RS-232		(58.46" × 3.42" × 36.41")(L × W × H) 75-inch: 1,707.2 mm × 87.1 mm × 1,050.1 mm
Video Input	1 × HDMI IN		(67.21" × 3.43" × 41.34") 86-inch: 1,953.0 mm × 87.1 mm × 1,188.6 mm
Audio Output	1 × 3.5 mm (Line out)	Product Dimensions 816.6 mm (49.66" × 3.19" × 32.15") (L × W 65-inch: (with camera): 1,485.0 mm × 86.9 941.2 mm (58.46" × 3.42" × 37.06") 75-inch: (with camera): 1,707.2 mm × 87.1 1,066.4 mm (67.21" × 3.43" × 41.98")	55-inch: (with camera): 1,261.4 mm × 80.9 mm ×
Others	1 × Touch		65-inch: (with camera): 1,485.0 mm \times 86.9 mm \times
IrDA	1		75-inch: (with camera): 1,707.2 mm \times 87.1 mm \times
Microphone	2		86-inch: (with camera): 1,953.4 mm × 87.1 mm × 1,205.1 mm (76.91" × 3.43" × 47.45")
Touchscreen			Top: 43.1 mm (1.70"); left/right: 16.1 mm (0.63");
Touch Technology Type	IR touch technology	Frame Size	bottom: 67.8 mm (2.67")
Response Time	< 10 ms	$\begin{array}{c} 7.09" \times 36.79") \text{ (L} \times \text{W} \times \text{H)} \\ 65\text{-inch: } 1587 \text{ mm} \times 235 \text{ m} \\ 9.25" \times 42.13") \\ 75\text{-inch: } 1810 \text{ mm} \times 235 \text{ m} \\ 9.25" \times 45.55") \end{array}$	55-inch: 1,366 mm ×180 mm × 935 mm (53.78" ×
Touch Points	20		65-inch: 1587 mm \times 235 mm \times 1070 mm (62.48" \times
Valid Touch	2 mm		75-inch: 1810 mm × 235 mm × 1157 mm (71.26" × 9.25" × 45.55") 86-inch: 2056 mm × 235 mm × 1334 mm (80.94" ×
Writing Mode	Finger + Stylus pen		
Communication Mode	USB		55-inch: 27.5 kg (60.63 lb)
Anti-light Interference	Anti-dazzle tempered glass	Net Weight	65-inch: 38 kg (83.80 lb) 75-inch: 54 kg (119.10 lb) 86-inch: 64 kg (141.10 lb)
Surface Hardness	8H	-	
Touch Resolution	32767 × 32767	Gross Weight	55-inch version: 32.5 kg (71.65 lb) 65-inch version: 46 kg (101.41 lb) 75-inch version: 65 kg (143.30 lb) 86-inch version: 77 kg (169.76 lb)
Number of Multi-user Writing Points	2		
Speaker			55-inch version: 400 mm × 400 mm (15.75" ×
Power	Full frequency: 2 × 15 W	6	15.75") 65-inch version: 400 mm × 500 mm (15.75" ×
Built-in Speaker	2	Holes Distance	19.69") 75-inch version: 400 mm × 600 mm (15.75" × 23.62")
Microphone			86-inch version: 400 mm × 750 mm (15.75" × 29.53")
Pick-up Distance	Far-field sound pickup: 6 m–8 m (19.69 ft–26.25 ft)	Installation	Wall mount, mobile bracket


Standby Power Consumption	0.5 W
Packing List	Smart interactive whiteboard \times 1; Power cord \times 1 (European standard); Stylus pen \times 2; Quick start guide \times 1; Wall mount bracket (already installed on the whiteboard) \times 1; Accessory package \times 1; Remote control \times 1
Certifications	CE

Installation

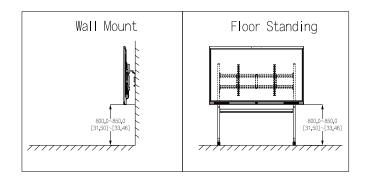

Dimensions (mm[inch])



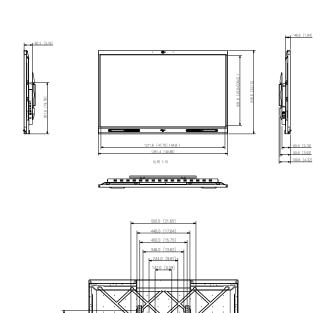

55-inch

