

Wireless Weatherproof Entry Alert System

E-931CS22RFCQ *Sensor Range: Up to 22ft (7m)*
Wireless Range: Up to 328ft (100m)

Features:


- Monitor a driveway or use as an entrance indicator
- No wiring necessary between sensor and speaker
- Sensor can pair with an unlimited number of speakers
- Speaker can pair with up to five sensors
- Sensor is weatherproof for outdoor use
- Speaker makes chime or alarm sound when beam is interrupted
- Alarm output time is adjustable from 3~30 seconds
- Includes weatherproof wireless reflective sensor (TX), wireless speaker (RX), reflector, two power adapters, three mounting brackets (for the sensor, reflector, and speaker)
- New optional wall-mount bracket available



Specifications:

		Sensor	Speaker
Sensing range		Up to 22ft (7m)	N/A
Wireless range		Up to 328ft (100m)	
Operating frequency		433.92 MHz	
Operating voltage		12VDC	
Current draw	Standby	5mA	25mA
	Active	20mA	100mA
Power input		2.5mm DC Jack	
Light source		IR LED	N/A
Operating temperature		32°~122° F (0°~50° C)	
Volume		N/A	0~90 dB
Alarm time range		N/A	3~30 s (adjustable)
Speaker output		N/A	Chime/Off/Alarm (selectable)
IP Rating		IP55	N/A
Dimensions		3 1/4" x 2 9/16" x 1 1/2" (82x66x38 mm)	3 1/4" x 2 15/16" x 1 9/16" (83x75x40 mm)

Wiring:

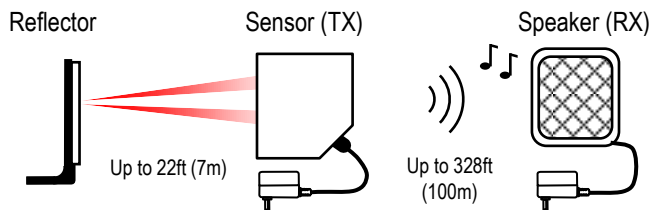

Optional Accessories:

	<p>E-931ACC-BLS8Q Wall bracket</p> 	<p>E-931ACC-SFQ Additional wireless speaker</p> 
<p>E-931ACC-HR1Q Reflector hood</p> 	<p>E-931ACC-CQ Digital counter</p> 	<p>E-931ACC-SPQ Solar charger for sensor unit</p> 