

UPS

IT systems for SMEs

X1+ UPS range is designed to **protect** personal computers and small business IT systems against **power supply problems** and dangerous electrical disturbances.



PC & Mac

The perfect solution for IT applications


- SMEs
- Office computer equipment (tower computer, PC monitor, router..)
- Electronic equipment (game console, TV player, NAS..)



Line Interactive Technology

Reliable protection

- Line Interactive Technology
- Regulation System allowing distribution of regular quality current
- FR/Schuko or IEC outlets*
- Up to 3 LED's indicators*
- 1 USB communication port and cable*



2 to 6 IEC or FR/Schuko outlets*



Up to 10 min backup time**



Remote control software



X1+ 500 VA




X1+ 1300 VA

Smart features

- High capacity batteries to power your connected equipments in the event of a power cut
- Overload protection & deep discharge battery protection
- Cold start function: UPS can start even if Mains is not present
- Automatic battery recharging when Mains power is back

*Depending on the model and/or connected load

** At 50% of charge; depending on the model and connected load

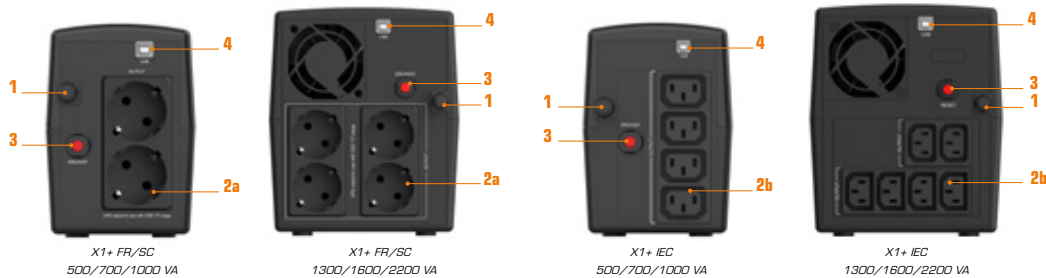

X1 + FR/SC
IEC
500 to 2200 VA

- 1. Integrated input power cable
- 2.a FR/Schuko outlets
- 2.b IEC outlets
- 3. Breaker
- 4. USB communication port

Technical Characteristics

	X1+ 500	X1+ 700	X1+ 1000	X1+ 1300	X1+ 1600	X1+ 2200
--	---------	---------	----------	----------	----------	----------

General Characteristics

Power	500 VA 300 W	700 VA 360 W	1000 VA 500 W	1300 VA 720 W	1600 VA 900 W	2200 VA 1320 W
Technology	Line Interactive					
Outlets	2 FR/Schuko or 4 IEC outlets			4 FR/Schuko or 6 IEC outlets		

Protection & filtering

Output form	Simulated Sine-wave					
Protection	Discharge / overcharge / overload / short circuit					
Input protection	Thermal circuit breaker					

Physical characteristics

Dimensions - D x W x H (mm)	286 x 96 x 138			298 x 148 x 178		
Net weight (Kg)	3,9	3,9	4,8	7,5	9	10,1

Input technical characteristics

Voltage	220/230/240 V					
Voltage range	162-290 VAC					
Frequency	50/60 Hz (auto sensing)					

Output technical characteristics (battery mode)

Voltage	220/230/240 V					
Automatic Voltage Regulation	± 10 %					
Frequency	50 ou 60 Hz ± 1 Hz (auto sensing)					

Battery

Battery charger	Operates when the UPS is connected to mains					
Cold start (no mains)	yes					
Recharging time	8 hours to 90% of capability					
Back up time (1 PC)	22 min		31 min		60 min	

Indicators

Indicators	ON/OFF switch LED x 1			ON/OFF switch LED x 4		
------------	-----------------------	--	--	-----------------------	--	--

Audible alarms

Battery mode	Sounding every 30 seconds					
Low battery	Sounding every 2 seconds					
Overload	Sounding twice every second					
Battery replacement	Sounding every 4 seconds					
Default	Continuously sounding					

Communication

Communication port	USB port (B-type plug)					
Communication software	PowerMaster Software					

Environment

Ideal environment	0-40°, 0-90% of relative humidity (without condensation)					
Noise level	<40 dB			<45dB		

Norms

Standard	CE RoHS					
EMC (Electromagnetic compatibility)	EN 62040-2:2018					
Low voltage (Safety)	EN 62040-1:2017+A1: 2021					

Sales infos

Warranty	2 years					
SKU - FR/Schuko outlets	66105	66106	66107	66108	66109	66110
SKU - IEC outlets	66111	66112	66113	66114	66115	66116

*Depending on the model and/or connected load

Content package

	UPS input cable	User Manual	USB Cable
500	1	1	-
700	1	1	-
1000	1	1	-
1300	1	1	1
1600	1	1	1
2200	1	1	1

Remote management

Allows programming of the UPS start/stop as well as the recording of data/events for daily maintenance. It is possible to control the status of the UPS at any time via the local network.

Free download on our website.

Warranty

2-year warranty against manufacturing defects under normal conditions and compliance with precautionary measures.

Warranty to be taken out on our website within 10 days of purchase.



Infosec Communication

15, Rue du Moulin
44880 SAUTRON - FRANCE

Sales contact
+33 2 40 76 11 77
sales@infosec.fr

